

TC-8900 All-in-one Controller Units and ES-8930 Remote Setpoint Module

Introduction

TC-8900 is a family of analogue controllers, designed for the control of fan coils with 2 pipe, 2 pipe with change-over, 2 pipe with electrical coil, or 4 pipe configurations.

The family includes All-in-one Controller Units (TC-8900), a Remote Set point Module (ES-8930) and Built-in Controller Units (TC-8930).

The TC-8900 has been designed to be easy to use, while integrating the most common room air conditioning control functions.



TC-8900 All-in-one Controller Unit



ES-8930 Remote Setpoint Module with TC-8930
Built-in Controller Unit

Features and Benefits

- | | |
|--|---|
| <input type="checkbox"/> All in one condensed package: sensor, direct/reverse input, window input, PI control, up to two valve outputs, mode (comfort/stand-by) push button and setpoint readjustment potentiometer | Provides better value for money in the smallest package |
| <input type="checkbox"/> Option to limit the setpoint adjustment range or to cancel the setpoint adjustment | Usability in critical environments where limited adjustability is preferred |
| <input type="checkbox"/> Active or passive input | Flexibility on the input: temperature, humidity, differential pressure etc. |
| <input type="checkbox"/> Modern and discreet cover which snaps onto a plug-in mounting base | Blends in with room décor. Easier installation |
| <input type="checkbox"/> Electric terminals located on mounting base | Easier wiring and commissioning |
| <input type="checkbox"/> Standard range of mounting kits | Mounting flexibility |

Ordering data

All-in-one Controller Units	Output	Sensor input*
TC-8903-1131-WK	1xPAT	Built-in NTC
TC-8901-2131-WK	2x0...10V	Built-in NTC
TC-8904-2131-WK	2xDAT	Built-in NTC
TC-8906-2131-WK	2xOn/Off	Built-in NTC
TC-8903-1132-WK	1xPAT	Remote NTC
TC-8901-2132-WK	2x0...10V	Remote NTC
TC-8904-2132-WK	2xDAT	Remote NTC
TC-8906-2132-WK	2xOn/Off	Remote NTC

- Setpoint range: 12...28°

All-in-one Controller Units	Output	Sensor input*
TC-8903-1151-WK	1xPAT	Built-in NTC
TC-8903-1152-WK	1xPAT	Remote NTC

- Setpoint range: 0...40°

All-in-one Controller Units	Output	Sensor input*
TC-8903-1183-WK	1xPAT	Remote 0...10V
TC-8901-2183-WK	2x0...10V	Remote 0...10V

- Setpoint range: 0...100%

*Remote sensor input: see "Specifications" last page of this document

Built-in Controller Units	Output	Sensor input*
TC-8933-1112-W	1xPAT	From ES
TC-8931-2112-W	2x0...10V	From ES
TC-8934-2112-W	2xDAT	From ES
TC-8936-2112-W	2xOn/Off	From ES

- Setpoint range: remote, see ES-8900

Remote Setpoint Module	Output	Sensor input*
ES-8930-3031-WK	-	Built-in NTC

- Setpoint range: 12...28°C

Accessories

Accessories (order separately)

Order code	Description
TM-9100-8900	Opening tool for sensor case
TM-9100-8901	Dial stop screws kit (bag of 100 self tapping screws)
TM-9100-8931-W	Plastic surface mounting kit
TM-9100-8941-W	Wall box mounting kit
TM-9100-8951-W	Panel mounting kit

See "RS-9100 product bulletin" for details on accessories.

Technical characteristics - models with NTC sensor input


Models	TC-8901 series	TC-8903 series	TC-8904 series	TC-8906 series
Dead Band	0 to 2 K	-	0 to 2 K	0 to 2 K
Differential	-	-	-	0.2 to 2 K
Proportional Band	1...4 K	2...8 K	1...4 K	-
Time base	-	120 seconds	5...15 minutes	-
Integral Time	-	Off or 4 minutes	-	-
Standby Offset BSB	2 K	2 K	2 K	2 K
Window Offset BOF	5 K	5 K	5 K	5 K

Technical characteristics - models with 0...10V sensor input

Models	TC-8901-2183-WK	TC-8903-1183-WK
Dead Band	0 to 10%	-
Proportional Band	5 to 20%	10 to 40%
Integral Time	-	Off or 4 minutes
Standby Offset BSB	10%	10%
Window Offset BOF	25%	25%

Application

The TC-89x0 Controllers operate either wall mount or fan coil mount, optionally receiving the set point from the Remote Setpoint Module.

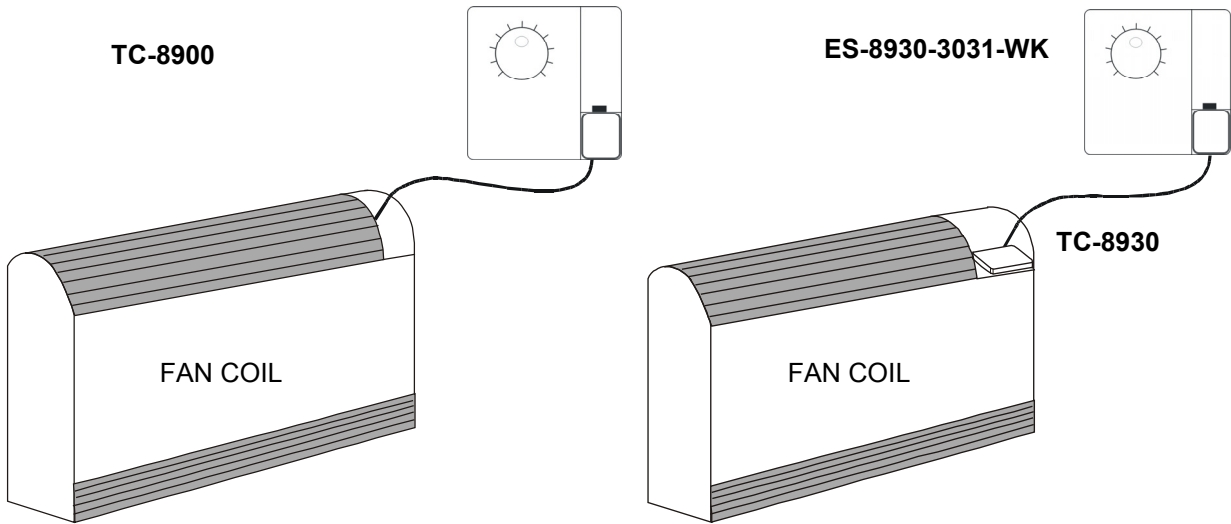


“All-in-one Controller Unit”, wall mount

Unit mount “Built-in Controller Unit”, with “Remote Setpoint Module”

Adjustment

Front description

- TC-8900 and ES-8930 (sliding cover open)

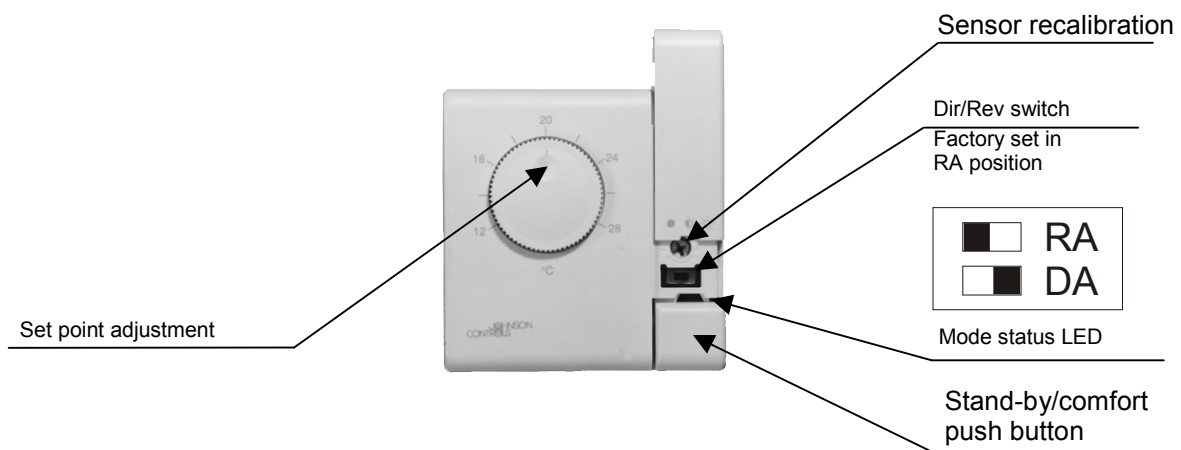

LED status		Mode Status
	on	comfort
	blinking	stand-by
	off	Window open


- TC-8930

No front adjustment


Back description

TC-8900 and TC-8930


- PB:** Proportional band
- DB:** Dead band
- Tn:** Integral time for PAT
- Time:** Time base for DAT
- Diff:** Differential for on/off control

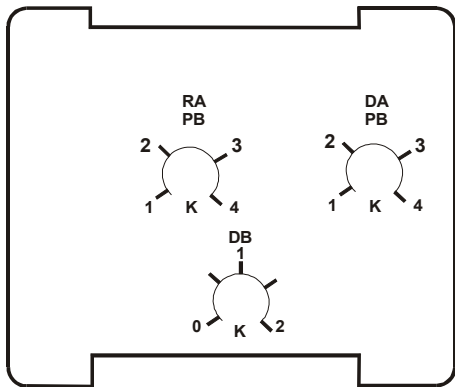


TC-89X1 (0...10 V)

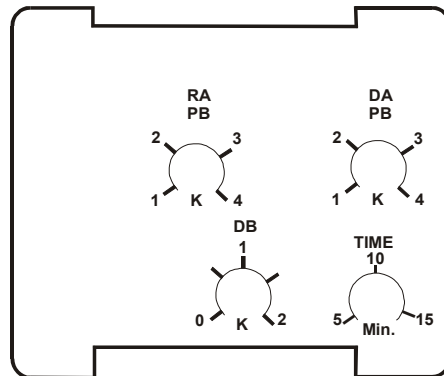

TC-89X4 (DAT)

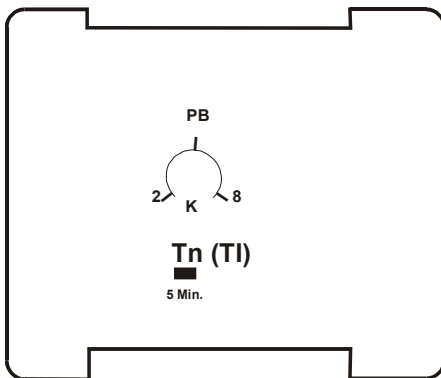

**TC-89X3 (PAT) (factory default – jumper closed
TI= 4 min)**

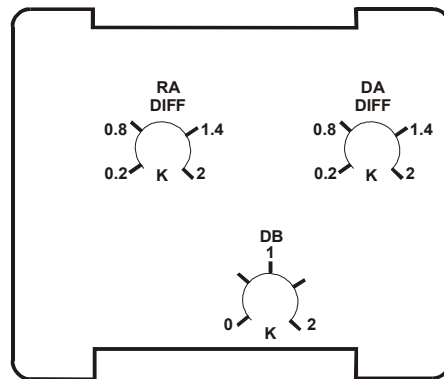

TC-89X6 (ON/OFF)


Factory settings: All trimmers are set at middle value.

ES-8930
No back adjustment


Operation

- SP:** Setpoint
- PB:** Proportional band
- DB:** Dead band
- BSB:** Standby offset
- BOF:** "Window open" offset


2x0...10V Outputs (e.g. 4-pipe system)

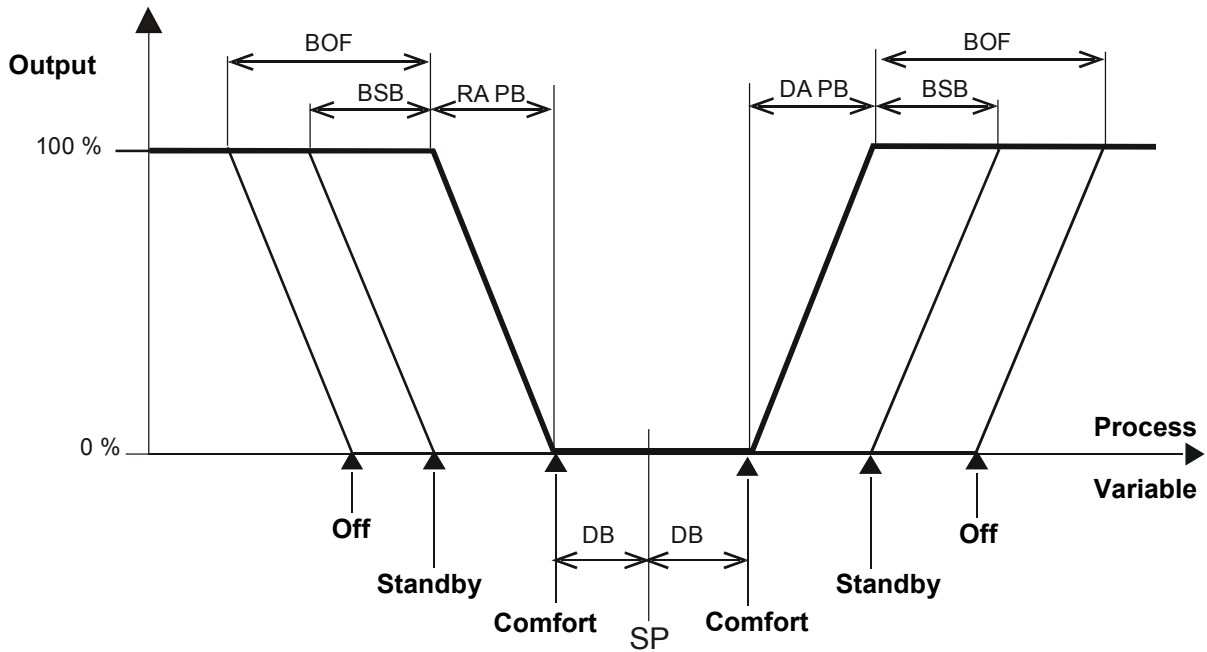

1x0...10V DA or RA Output (2-pipe system with change-over, use the "RA" output of the controller)

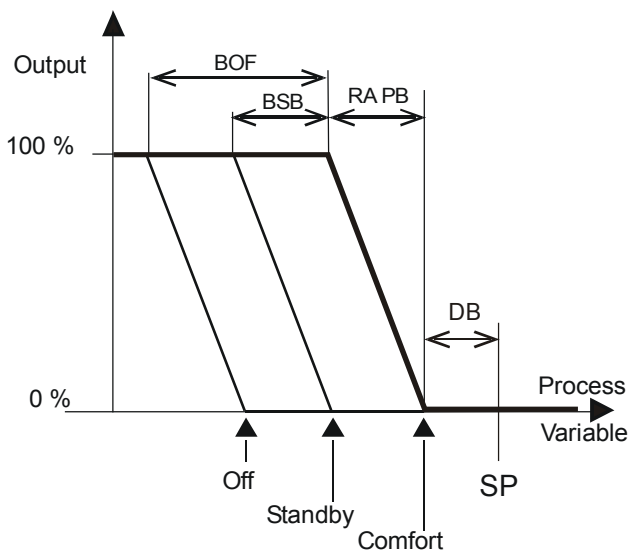


RA (Reverse acting)

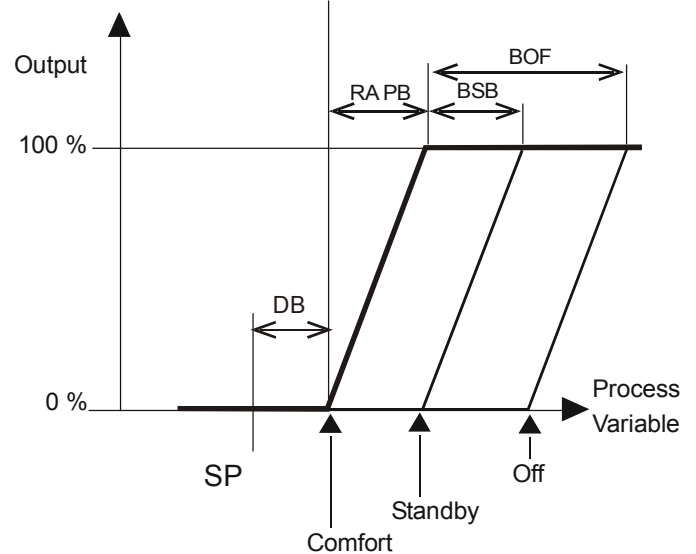


DA (Direct acting)

2XDAT Outputs (e.g. 4-pipe system)

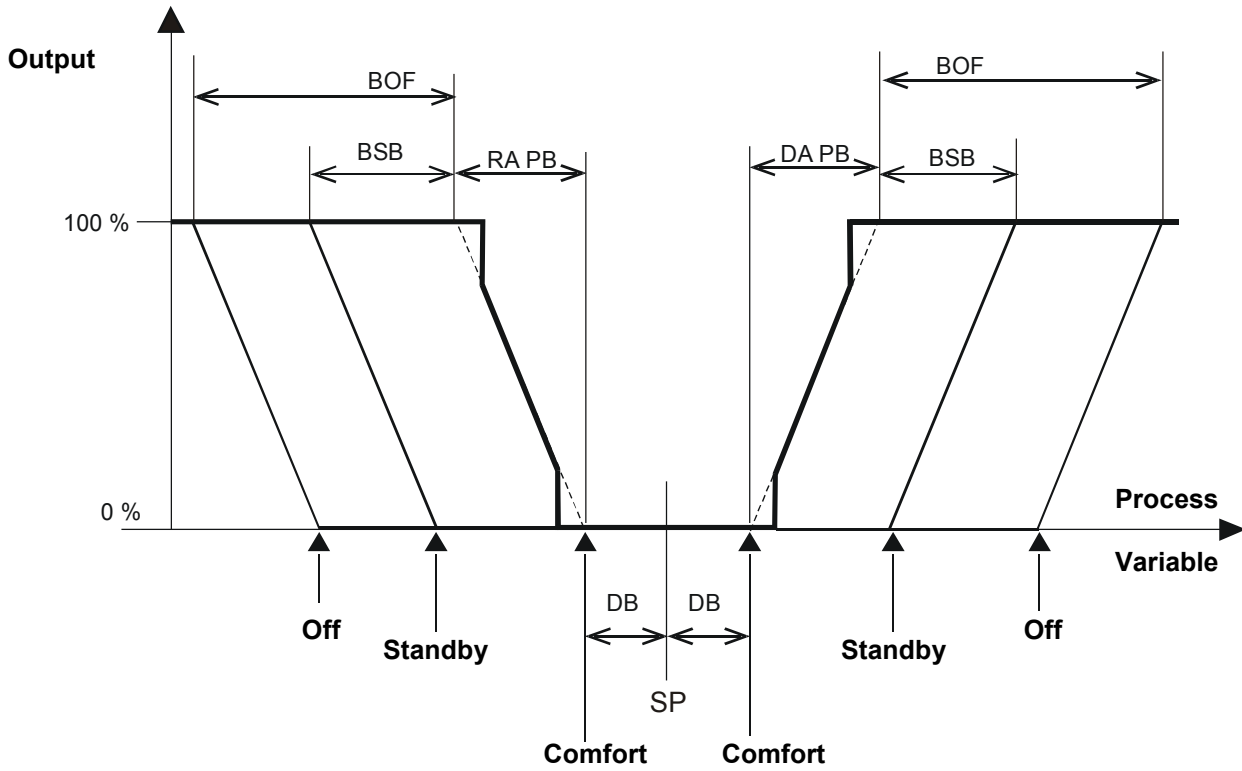


1XDAT DA or RA Output (2-pipe system with change-over, use the "RA" output of the controller)

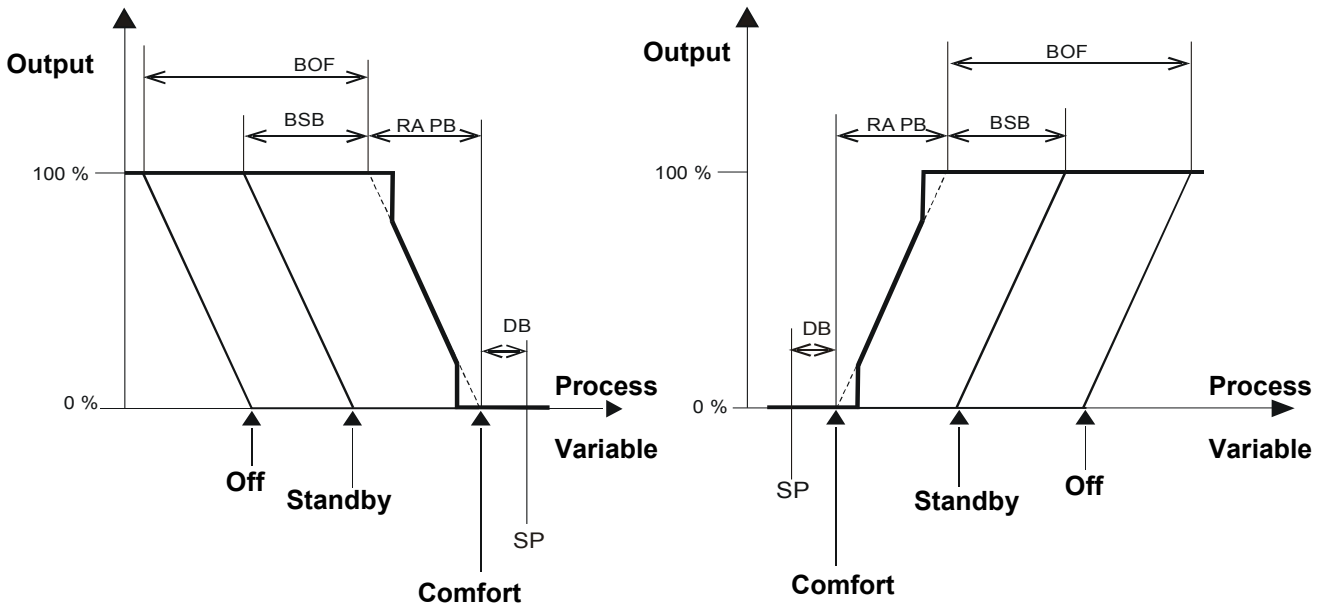


RA (Reverse acting)

DA (Direct acting)


2xOn/Off Outputs (e.g. 4-pipe system)

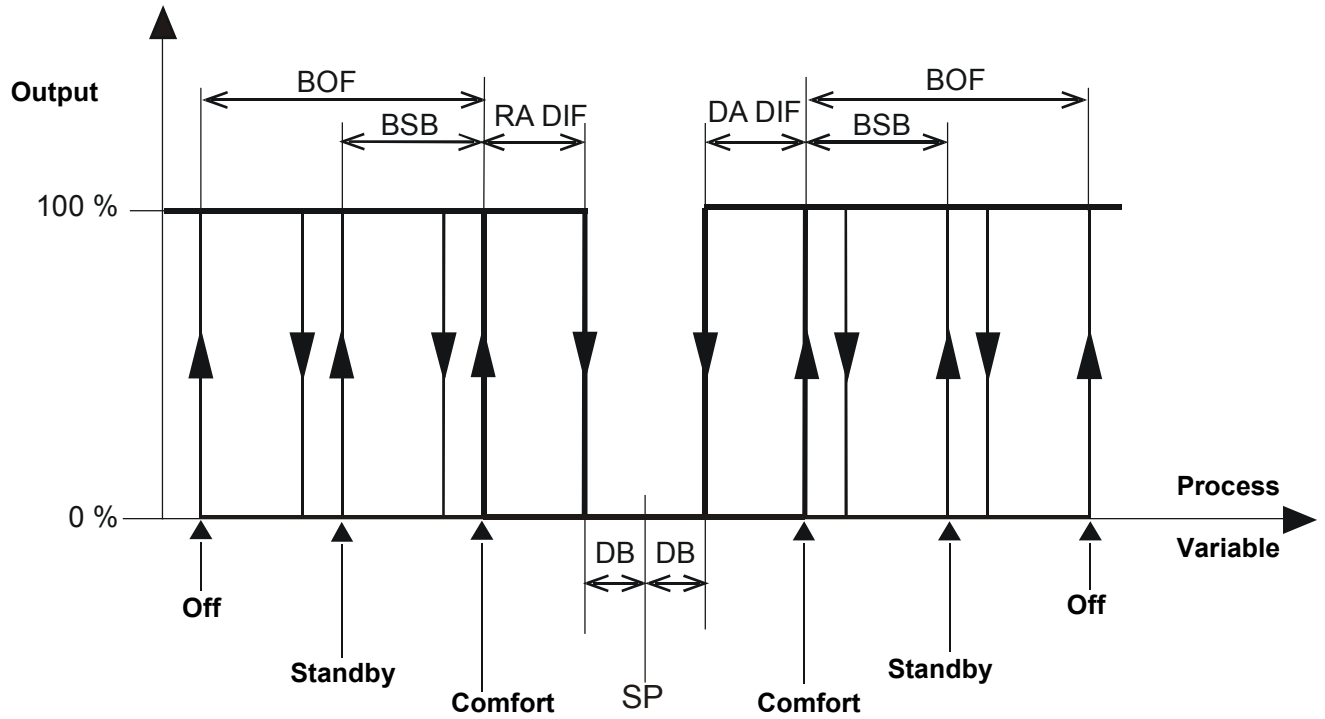

1xOn/Off DA or RA Output (2-pipe system with change-over, use the "RA" output of the controller)

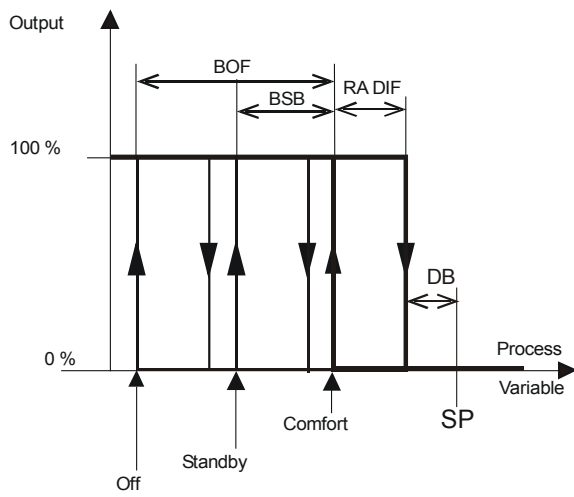

RA (Reverse acting)

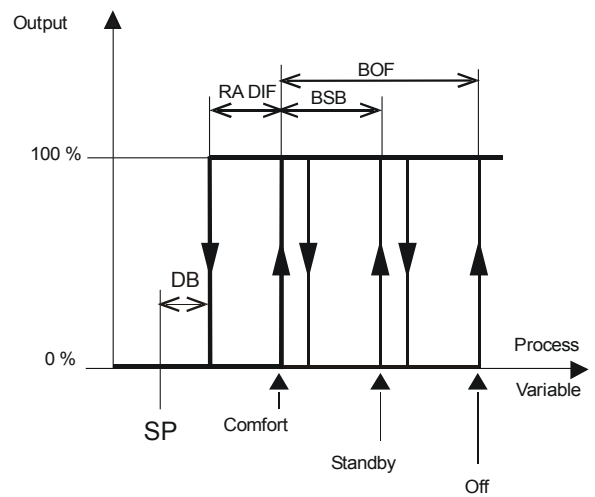



DA (Direct acting)

Wiring Diagram

The following drawings indicate the connection diagrams of the different stand alone models and Remote Setpoint Module.

The contacts have the following functions:


- Window contact (): Window closed = contact closed
- Dir /Reverse contact (): Direct (summer) = contact closed
Reverse (winter) = contact open

A change-over thermostat can be connected to terminals 7 and 8. In that case the internal contact must be fixed at winter (open).

Models	Diagram n°
TC-8903-1131-WK	1
TC-8901-2131-WK	2
TC-8904-2131-WK	1
TC-8906-2131-WK	1
TC-8903-1132-WK	1
TC-8901-2132-WK	2
TC-8904-2132-WK	1
TC-8906-2132-WK	1

Models	Diagram n°
TC-8903-1151-WK	1
TC-8903-1152-WK	1
TC-8903-1183-WK	3
TC-8901-1283-WK	4
TC-8933-1112-W	5
TC-8931-2112-W	5
TC-8934-2112-W	5
TC-8936-2112-W	5
ES-8930-3131-WK	5

Diagram 1

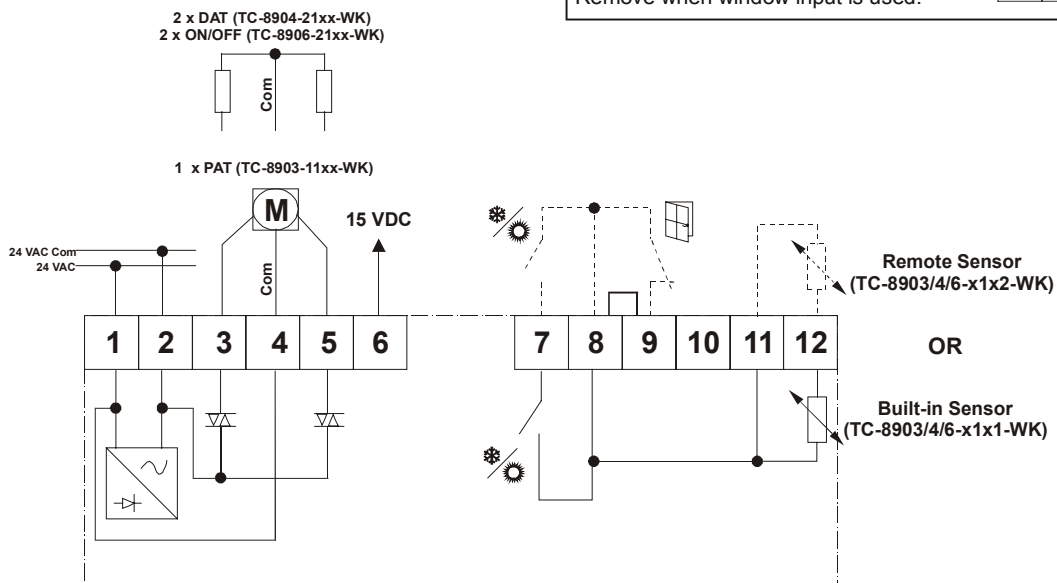

PAT models (TC-8903) : terminals 3 & 5 functions

Jumper Action Position	Temperature (*)	Terminal Energised	
		3	5
RA	↑	ON	OFF
	Set point	OFF	OFF
	↓	OFF	ON
DA	↑	OFF	ON
	Set point	OFF	OFF
	↓	ON	OFF

(*) ↑ Temperature increase ↓ Temperature decrease

Diagram 2

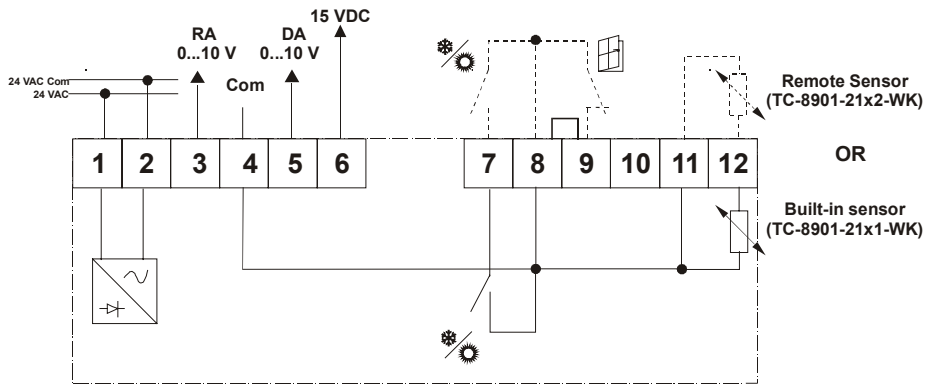


Diagram 3


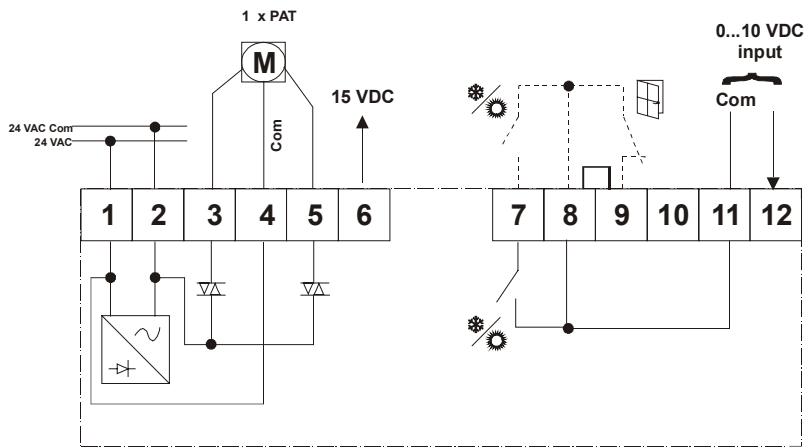


Diagram 4

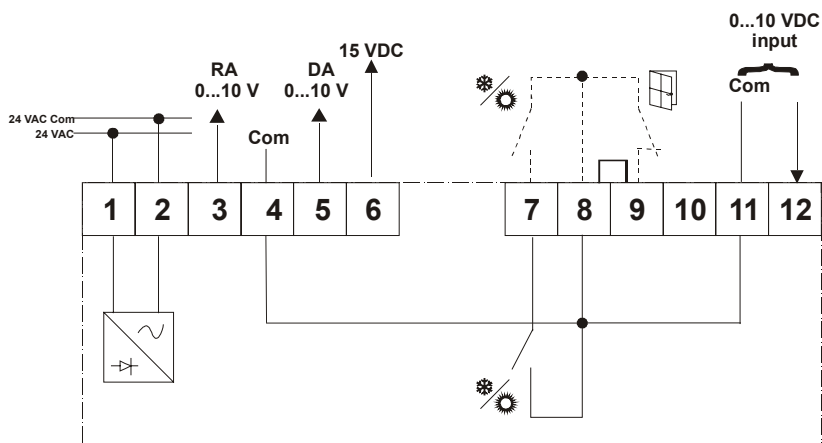

Note:
 On TC-890X Window Jumper factory set.
 Remove when window input is used.






Diagram 5

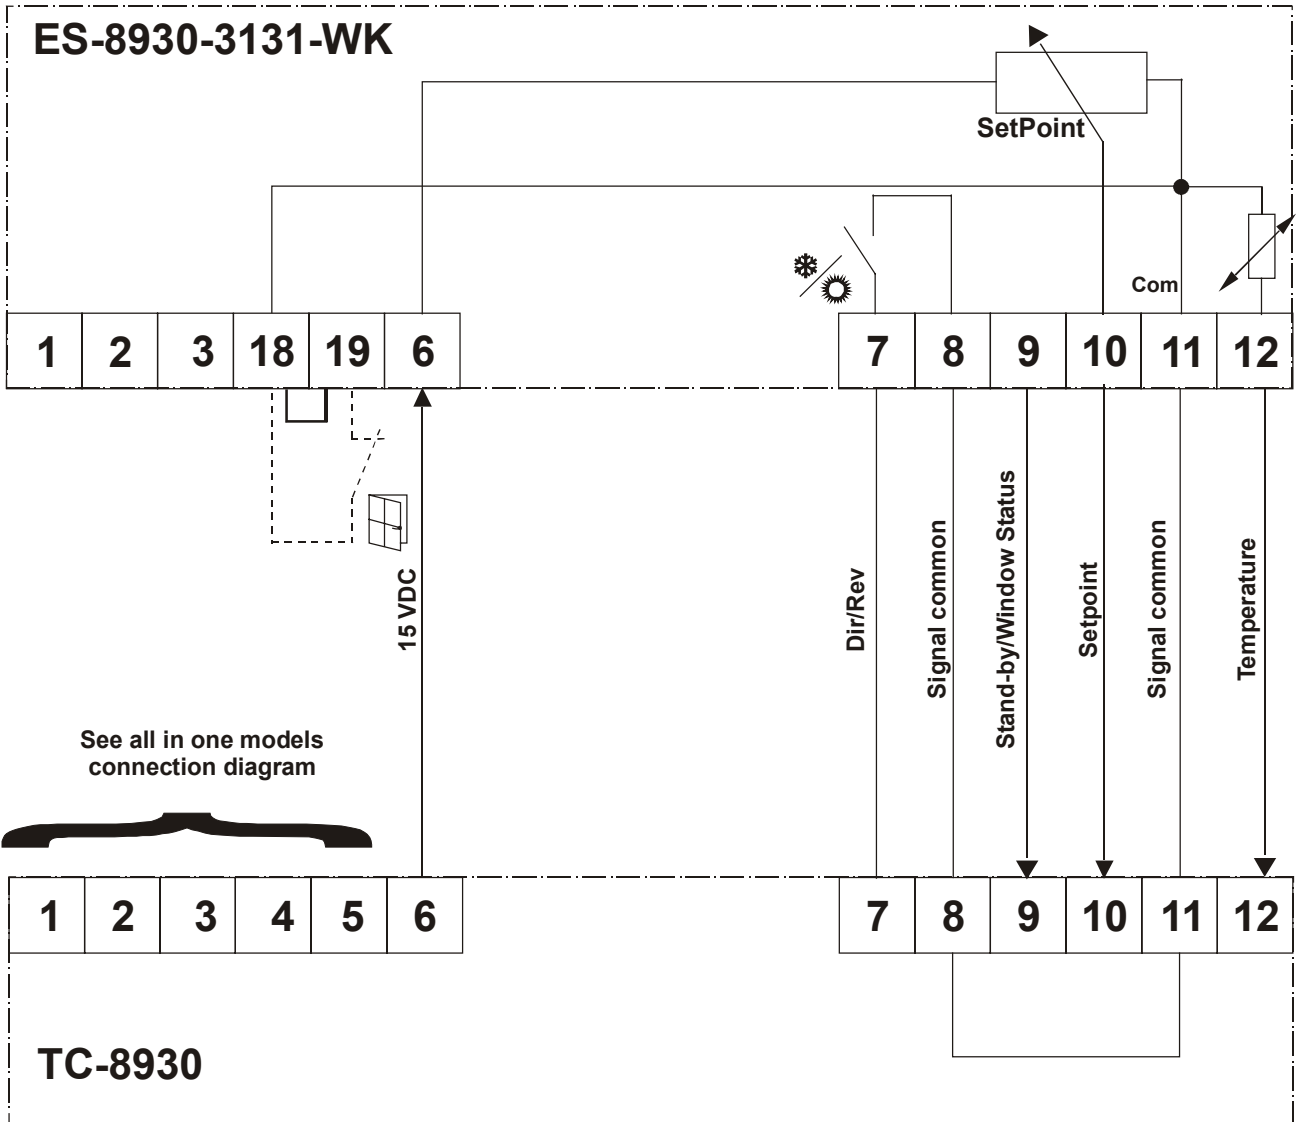


Note:

On ES-8930 Window Jumper factory set. Remove when window input is used.



Dimensions (in mm)

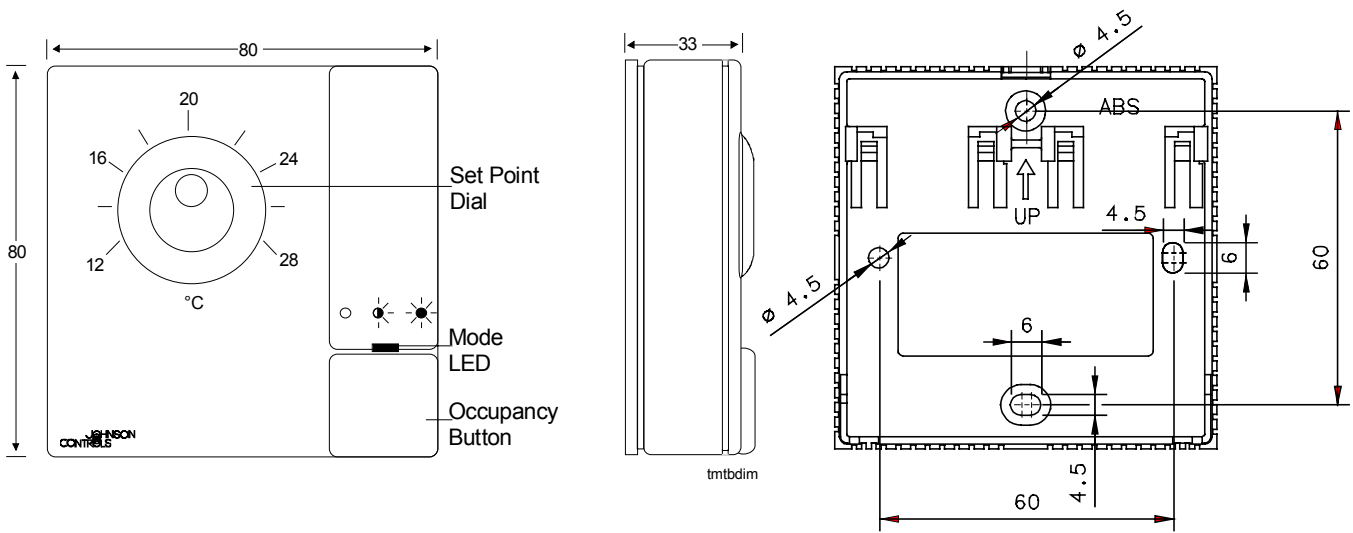

TC-8900 series stand alone and ES-8930

TC-8930 series has the same external dimensions as TC-8900, without setpoint dial, push button, LED and sliding cover.

Specifications

Models	TC-89x0	ES-8930
Supply	24VAC ±15%	Supplied by TC-8930
Power consumption	1.5 VA with no load	---
Output	TC-89x1: 0...10V 10mA max TC-89x3/4/6: triac 0,5A max 24VAC	---
Sensor ricalibration	CW + 0.8 °C CCW - 0.8 °C	---
Remote sensor	<ul style="list-style-type: none"> • NTC K10 10kΩ at 25°C (TE-9100-8502 or TS-9104 Sensor series) • 0...10V (input impedance >50kΩ) (TS-9101, HT-9000, PS-910x PT-910x Sensor series) 	
Ambient operating temperature	0...50°C	
Humidity range	0 to 95% not condensing	
Storage temperature	-20 +70°C	
Mode indicator	Red LED to indicate comfort (ON), standby (blinking), off (OFF), not available on TC-8930	
Mounting	Direct surface mount, plastic base for surface mount with wiring conduits, and recessed wall box and panel mounting kits. (See Ordering Codes.)	
Housing	Material: ABS + polycarbonate, self-extinguishing VO UL94. Protection: IP30 (IEC529) Color: RAL-9010 pure white	
Dimensions (H x W x D)	80 mm x 80 mm x 33 mm	
Shipping Weight	0.15 kg	
CE Compliance:	EMC (89/336 EEC) according to the standard EN 50081-1 and EN 50082-1	

*** Note: other technical characteristics can be found in page 2**

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office or representative. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products.