


WIND SENSOR with 0-10V output

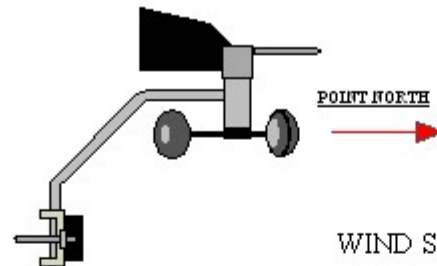

WIND SENSOR

The combined Wind Speed and Direction Sensors are manufactured from anodized aluminium alloy, UPVC and stainless steel with moulded polycarbonate cups. The units are lightweight (less than 250 grams) yet very robust.

The sensors are designed to be mounted to a mast of between 30 - 50 mm diameter by means of a V-shaped clamp and bracket. This allows simple orientation to North using the compass provided; the only setting up required.

Wind Direction is sensed by a precision conductive potentiometer which combines exceptionally long life with high sensitivity.

Wind Speed is derived from a Hall Effect solid state magnetic switch activated by magnets in the cup rotor running in precision stainless steel ball race and 'Oxide' bearing giving very high sensitivity and very long life.


Specification

WIND SPEED

Typical accuracy	5% or 1.5 m/s
Resolution	better than 0.5 m/s
Threshold	<0.5 m/s

WIND DIRECTION

Accuracy	+/- 5 degs. typical (+/- 10 degs. worst case)
Resolution	Generally < 1 deg. (+/- 10 degs. at North)
Threshold	<0.5 m/s

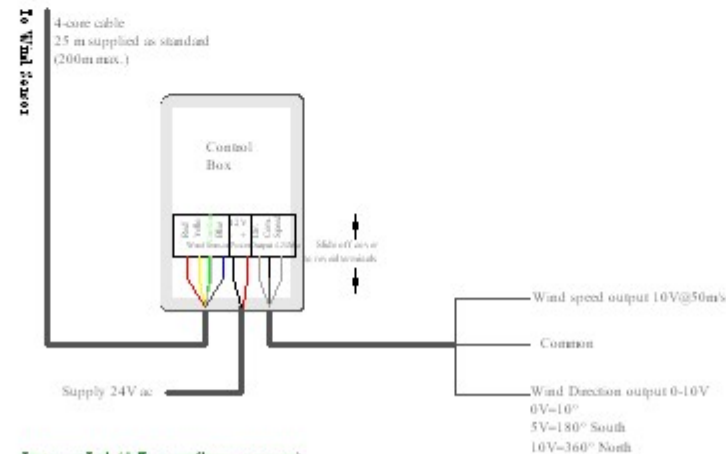

Increase Ltd. (A Bevinco Group company)

Lyngate Industrial Estate, North Walsham, Norfolk, NR25 8AW. Tel: +44 (0)1692 502588 Fax: +44 (0)1692 502581 e-mail: sales@increase-group.co.uk
 website: www.increase.co.uk www.increasemarine.co.uk www.increasemarinegroup.co.uk

001 000 002 Rev. 1 28.08.04