



Valve models	Kvs direct way [m³/h]	Kvs angle way [m³/h]	Close-off [bar]	Connections (*)
Two-way valves				
VSX09P	0,25	—	2,5	G1/2M
VSX10P	0,4			
VSX11P	0,6			
VSX12P	1			
VSX13	1,6		1,5	G3/4M
VSX13P				
VSX21	2,5			
VSX21P				
Three-way valves				
VMX09P	0,25	0,25	2,5	G 1/2 M
VMX10P	0,4	0,4		
VMX11P	0,6	0,6		
VMX12P	1	0,8		
VMX13P	1,6	1		
VMX13				
VMX21	2,5	1,6	1,5	G 3/4 M
VMX21P				
Three-way valves with built-in by-pass (4 ports)				
VTX09P	0,25	0,25	2,5	G 1/2 M
VTX10P	0,4	0,4		
VTX11P	0,6	0,6		
VTX12P	1	0,8		
VTX13P	1,6	1		
VTX13				
VTX09P4	0,25	0,25		
VTX10P4	0,4	0,4		
VTX11P4	0,6	0,6		
VTX12P4	1	0,8		
VTX13P4	1,6	1		
VTX21	2,5	1,6	1,5	G 3/4 M
VTX21P				

(*) The connections of models having "P" ending are suitable for flat gasket tight; the others for conic tight.

Conic
tight



Flat
tight



Actuator model	Power supply	Action
MVX21	110-230 V	ON/OFF
MVX41	24 V	ON/OFF
MVX57	24 V	0-10V proportional

Note: In case of motorized valves it is necessary to add to the model name the suffix **M2** for MVX21, **M4** for MVX41 and **M5** for MVX57 (E.g. VMX13M2).


OPERATION

Micra are valves with tight close-off on both direct and angle way. A soft tight between seat and plug ensures high performances; the action of the spring located on the valve, ensures tight close-off in compliance with the values above, even with disassembled actuator. All models are normally closed.

The actuator operation is carried out by a built-in wax thermostatic element. When this component is heated (by a PTC powered from the control signal) a small piston comes out, starting the valve stroke.

The actuator-valve assembly is easily made thanks to its threaded ring nut, which allows a comfortable cable positioning. All models are provided with a stroke indicator (see below).

The actuators are available in the ON-OFF (230V and 24V) or modulating (24V) with 0-10V signal versions.

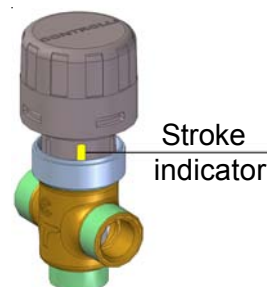

APPLICATIONS AND USE

Micra valves are employed for the control of chilled and heated water in heating and air-conditioning plants; they are motorized by the MVX electro-thermal actuator.

Micra valves extremely reduced dimensions enable an easy mounting on terminal unit coils.

Moreover, it is possible to order a kit for fan coil installation, which can be customized according to the various vendors' requirements. For further information, please contact our Technical Support.

INSTALLATION AND MOUNTING

Before mounting, make sure pipes are clean, free from weld slag, perfectly aligned with the valve body and not subjected to vibrations.

The protection degree declared (IP44) is granted if the valve is mounted with the actuator upwards. The actuator is able to operate in any mounting position, but it is advisable not to install it downwards.

Three-way valves should be preferably used as mixing valves. In case they are mounted as diverting (i.e. an inlet and two outlets) the max differential pressure for normal operation must be reduced to one third of the specified value.

While mounting, respect the fluid directions indicated by the arrows on the valve body.

TECHNICAL CHARACTERISTICS

VALVES

Operating pressure	16 bar
Stroke	2,5 mm
Max fluid speed	3 m/s
Allowed fluids	Water, water+glycol (30% max)
Temperature	5T95°C
Leakage	0 (tight close-off on direct and angle way)

Material

Valve body	Brass
Stem	Stainless steel
Stem Tight	Double OR ring in Viton


ACTUATORS

Power supply	110 - 230V / 24 V
Frequency	50/60Hz
Starting time	(1 st movement at 20°C) 60 s (for 230V power supply)
Consumption:	

	MVX21 230 Vac	MVX21 110 Vac	MVX41 24 Vac	MVX57 24 Vac
Starting	50 VA	12 VA	4 VA	5 VA
Working	1.8 VA	1.8 VA	1.8 VA	1.8 VA


Protection degree	IP44 (for vertical mounting)
Temperature	
- working	2T50 °C
- storage	-10T60 °C
Force	90N
Power cable	2m bipolar (0,75 mm ²) for MVX21-41 2m Three-pole cable (0,35 mm ²) for MVX57
Material	Fire-resistant case: class V0

PRESSURE DROP DIAGRAM

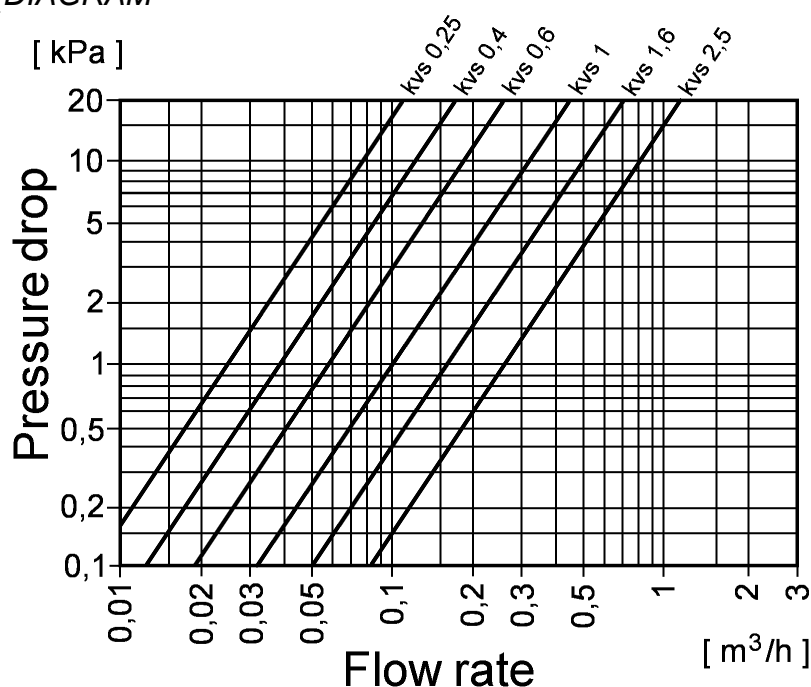


OVERALL DIMENSIONS (mm)


VSX-MVX21/41

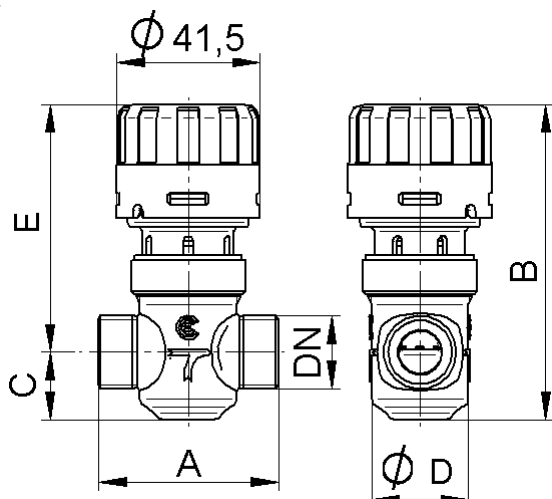

VMX-MVX21/41

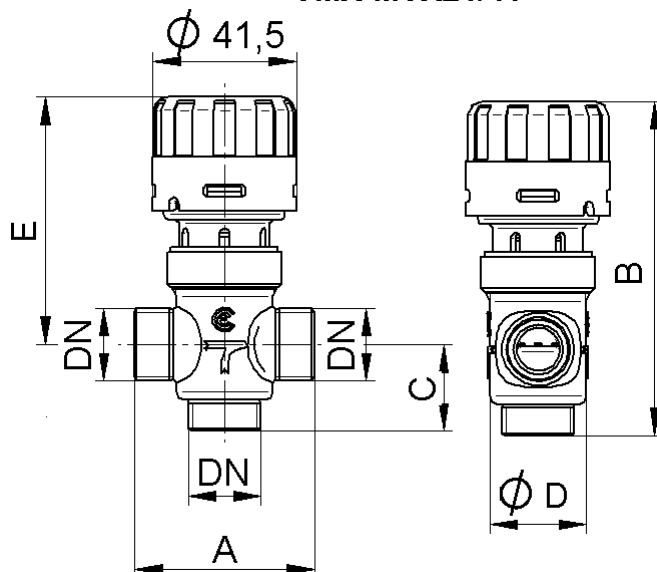


VTX-MVX21/41

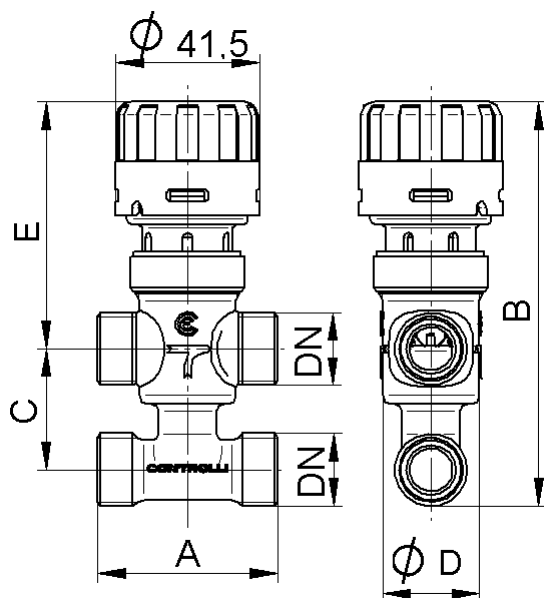

Valve+actuator dimensions	DN	A	B	C	D	E
VSX09P-VSX10P VSX11P-VSX12P VSX13P-VSX13 + MVX21/41	1/2"	52	95,5	19,5	28	76
VSX21-VSX21P + MVX21/41	3/4"	56	95,5	19,5		
VMX09P-VMX10P VMX11P-VMX12P VMX13P-VMX13 + MVX21/41	1/2"	52	101	25	28	76
VMX21-VMX21P + MVX21/41	3/4"	56	110	34		
VTX09P-VTX10P VTX11P VTX12P VTX13P-VTX13 + MVX21/41	1/2"	52	122	35	28	76
VTX09P4-VTX10P4 VTX11P4-VTX12P4 VTX13P4 + MVX21/41	1/2"	52	127	40		
VTX21-VTX21P + MVX21/41	3/4"	56	139	50		


ACCESSORIES

VXC Manual control.

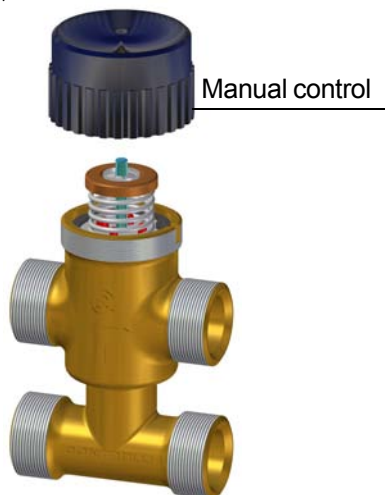


APPLICATION DIAGRAMS FOR VALVES MOUNTED AS MIXING

Three-way valves

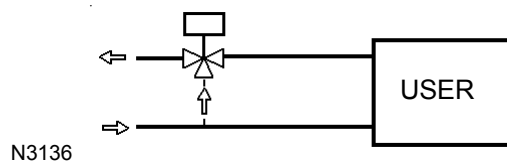


DIMENSIONS (mm)


VSX-MVX57

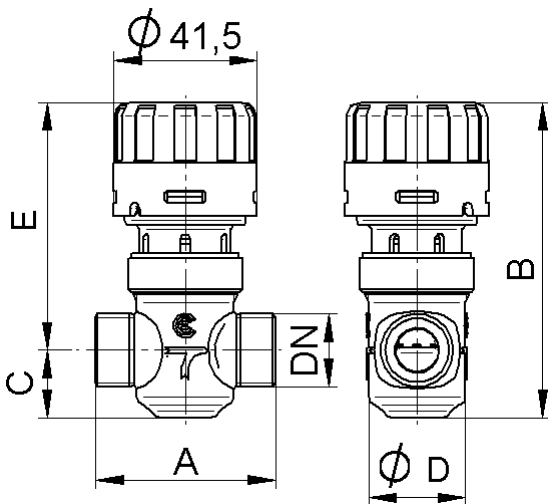

VMX-MVX57

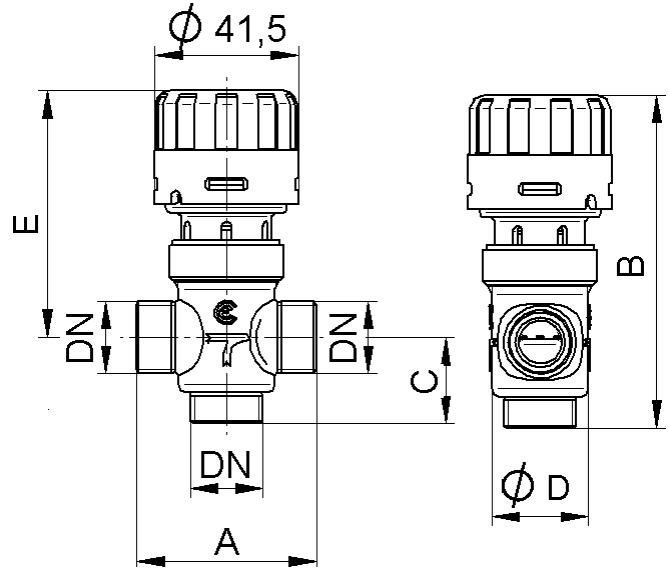

VTX-MVX57

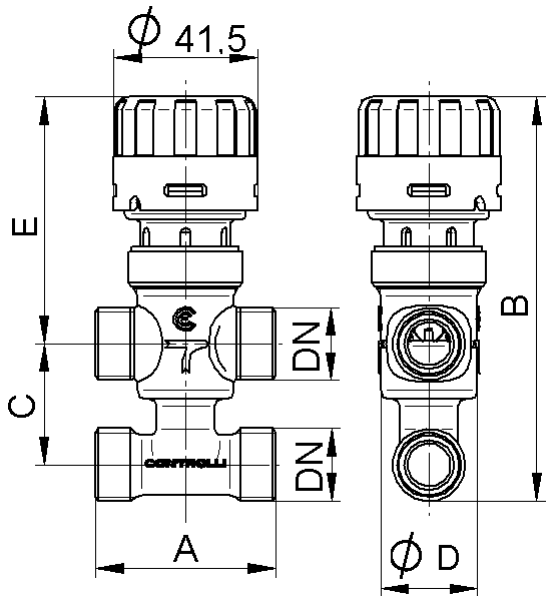

Valve+actuator dimensions	DN	A	B	C	D	E
VSX09P-VSX10P VSX11P-VSX12P VSX13P-VSX13 + MVX21/41	1/2"	52	95,5	19,5	28	76
VSX21-VSX21P + MVX21/41	3/4"	56	95,5	19,5		
VMX09P-VMX10P VMX11P-VMX12P VMX13P-VMX13 + MVX21/41	1/2"	52	101	25	28	76
VMX21-VMX21P + MVX21/41	3/4"	56	110	34		
VTX09P-VTX10P VTX11P VTX12P VTX13P-VTX13 + MVX21/41	1/2"	52	122	35	28	76
VTX09P4-VTX10P4 VTX11P4-VTX12P4 VTX13P4 + MVX21/41	1/2"	52	127	40		
VTX21-VTX21P + MVX21/41	3/4"	56	139	50		

WIRING CONNECTIONS (MVX57)



- Green = Control signal (0-10V)
- Brown = 24 V 50/60 Hz
- White = Common

The performances stated on this sheet can be modified without any prior notice due to design improvement.