

# PolyGard® Oxygen O<sub>2</sub> Transmitter ADT93 1195

## Description

O<sub>2</sub> transmitter including digital measurement value processing and temperature compensation for the continuous monitoring of the oxygen concentration in the ambient air. Comfortable calibration routine with selective access release is integrated in the transmitter. The ADT-93 possesses a standard analog (0) 4- 20 mA or (0) 2- 10 V DC, and an RS-485 interface. 2 relays with adjustable switching thresholds are available as an option.

## Application

For the detection of oxygen in rooms where changes of the oxygen concentration are possible, such as laboratories and food production etc. Due to the standard analog signal and the RS-485 Interface the O<sub>2</sub> transmitter is compatible to the PolyGard series MGC and DGC by MSR-E as well as to any other electronic control or automation system.



www.msr-electronic.de

Stainless steel housing

## Features

- Digital measurement value processing incl. temperature compensation.
- Continuous monitoring
- Low output drift
- Poisoning stable
- Long life sensor
- Modular plug-in technology
- Easy maintenance
- Comfortable calibration with selective access release
- Reverse polarity protected, overload and short-circuit proof
- (0) 4 - 20 mA / (0) 2 – 10V analog signal output, selectable
- Serial interface RS-485
- Manual calibration via potentiometer (option)
- Manual addressing for RS-485 mode (option)
- 4 – 20mA analog input for external AT transmitter (optional)
- Relay output (optional)
- Integrated buzzer (optional)
- Serial interface (optional)
- LCD display (optional)
- Heating (optional)
- Duct mounting (optional)
- IP65 protected (optional)

## Specifications

|                                     |                                                                            |
|-------------------------------------|----------------------------------------------------------------------------|
| <b>General sensor performance</b>   |                                                                            |
| Detected gas                        | Oxygen (O <sub>2</sub> )                                                   |
| Sensor element                      | Electrochemical, diffusion                                                 |
| Measuring range                     | 0 – 25 vol. %                                                              |
| Accuracy                            | ± 0,1 vol. %                                                               |
| Long term output drift              | < 4% signal loss/year                                                      |
| Response time                       | t <sub>90</sub> ≤ 15 s                                                     |
| Sensor life expectancy              | 2 year, normal operating environment                                       |
| Temperature range                   | - 10 °C to + 50 °C (14 °F to 122°F)                                        |
| Pressure range                      | Atmospheric ± 10 %                                                         |
| Humidity range: Continuous          | 5 – 95 % RH non-condensing                                                 |
| Short-time                          | 0 – 99 % RH non-condensing                                                 |
| Storage temperature                 | 5 °C to 30 °C (41 °F to 86 °F)                                             |
| Storage time                        | 6 months                                                                   |
| Mounting height                     | 1,5 to 1,8 m (5 – 6 ft.)                                                   |
| <b>Electrical</b>                   |                                                                            |
| Power supply                        | 18 - 28 VDC/AC, (reverse polarity protected)                               |
| Power consumption (without options) | 22 mA, max. (0,6 VA)                                                       |
| <b>Output signal</b>                |                                                                            |
| Analog output signal                | (0) 4 – 20 mA, load ≤ 500 Ω,                                               |
| Selectable: Current / tension       | (0) 2 - 10 V, load ≥ 50 k Ω                                                |
| Starting point 0 / 20 %             | proportional, overload and short-circuit proof                             |
| <b>Serial Interface</b>             |                                                                            |
| Transceiver                         | RS 485 / 19200 Baud (9600 at Mod_Bus)                                      |
| <b>Physical characteristics</b>     |                                                                            |
| Enclosure material*                 | Stainless steel V2A                                                        |
| Enclosure colour*                   | Natural, brushed                                                           |
| Dimensions * (HxWxD)                | 113 x 135 x 45 mm (5.35 x 4.5 x 1.8 in.)                                   |
| Weight*                             | approx. 0,5 kg (1.1 lbs.)                                                  |
| Protection class*                   | IP 55                                                                      |
| Mounting*                           | Wall mounted, pillar mounted                                               |
| Cable entry                         | Standard 1 x M 20                                                          |
| Wire connection                     | Screw type terminal, 0,25 to 2,5 mm <sup>2</sup><br>24 to 14 AWG           |
| Wire distance                       | Current signal: ca. 500 m (1500 ft)<br>Voltage signal: ca. 200 m (600 ft.) |
| <b>Guidelines</b>                   |                                                                            |
|                                     | EMC Directive 89/336/EEC                                                   |
|                                     | CE                                                                         |
| <b>Warranty</b>                     |                                                                            |
|                                     | One year on material (without sensor)                                      |
| <b>Options</b>                      |                                                                            |
| <b>Relay output</b>                 |                                                                            |
| Alarm relay 1                       | 30 VAC/DC, 0,5 A, potential-free, SPDT                                     |
| Alarm relay 2                       | 30 VAC/DC, 0,5 A, potential-free,<br>SPNO/SPNC                             |
| Power consumption                   | 30 mA, (max 0,8 VA)                                                        |

|                                       |                                                                    |
|---------------------------------------|--------------------------------------------------------------------|
| <b>Warning buzzer</b>                 |                                                                    |
| Acoustic pressure                     | 85 dB (distance 300 mm) (1 ft)                                     |
| Frequency                             | 3,5 kHz                                                            |
| Power consumption                     | 30 mA, (max 0,8 VA)                                                |
| <b>LCD Display</b>                    |                                                                    |
| LCD                                   | Two lines, each 16 characters                                      |
| Power consumption                     | 10 mA, (max 0,3 VA)                                                |
| <b>Heating</b>                        |                                                                    |
| Temperature controlled                | 3 °C ±2°C (37.4 °F ± 3,6 °F)                                       |
| Ambient temperature                   | - 40 °C (- 40 °F)                                                  |
| Power supply                          | 18 - 28 VDC/AC                                                     |
| Power consumption                     | 0,3 A; 7,5 VA                                                      |
| <b>Analog Input</b>                   |                                                                    |
| Only for RS-485 mode                  | 4 – 20 mA overload and short-circuit proof, input resistance 200 Ω |
| Power supply for external transmitter | 24 VDC max. 50 mA                                                  |

\*For option "stainless steel" and further enclosure types see datasheet AT-DT Enclosure.



## Ordering Information

ADT-93-1195-X-XXXXXXXXXX

### Options

|            |                                           |
|------------|-------------------------------------------|
| 1XXXXXXXXX | Relay output                              |
| X1XXXXXXXX | Buzzer int.                               |
| XX1XXXXXXX | Heating                                   |
| XXXX1XXXXX | RS- 485 protocol for DGC-05 series        |
| XXXX2XXXXX | RS- 485 protocol ModBUS                   |
| XXXX3XXXXX | RS- 485 protocol customers' specification |
| XXXXX1XXX  | Calibration / addressing mode tool        |
| XXXXX2XXX  | Manual addressing                         |
| XXXXX3XXX  | Manual calibration                        |
| XXXXX4XXX  | Manual calibration / addressing           |
| XXXXXX1XX  | LCD display                               |
| XXXXXXX1X  | 4 – 20 mA analog input                    |
| XXXXXXXXX1 | Factory calibration 0 – 25 vol %          |

### Enclosure<sup>1</sup>


|   |                   |
|---|-------------------|
| 0 | Plastic enclosure |
| 1 | Duct mounting     |
| 2 | Steel, galvanised |
| 3 | Aluminium         |
| 4 | IP65 protected    |
| 5 | Stainless steel   |

<sup>1</sup> See Data sheet „PolyGard AT/DT Enclosure”

**Example:** O<sub>2</sub> transmitter with factory calibration 0 – 25 vol %, tool calibration, stainless steel housing

**Ordering No.:** ADT-93-1195-5-00001001

## Connecting Diagram

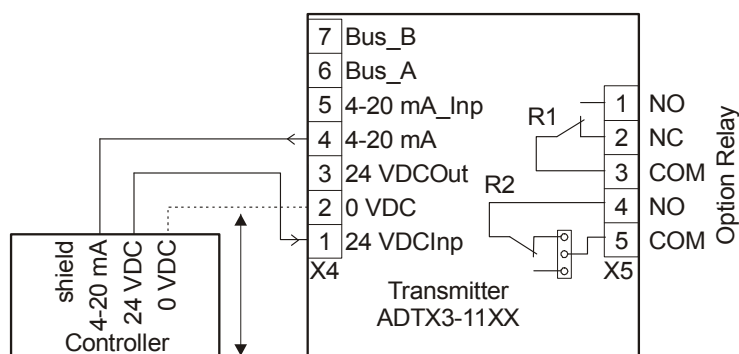

0 VDC: Two wire mode only with 4 to 20 mA Output signal