

# EE65 Series

## Air Velocity Transmitter for HVAC Applications


EE65 air velocity transmitters are ideal for accurate ventilation control applications. They are operating on an innovative hot film anemometer principle. The E+E thin film sensor guarantees very good accuracy at low air velocity, which is not possible for conventional anemometers with commercial temperature sensors or NTC bead thermistors. Moreover, the E+E sensor is much more insensitive to dust and dirt than all other anemometer principles. This means high reliability and low maintenance costs.

EE65 series are available with current or voltage output, the measuring range and the response time can be selected with jumpers by the user.

Low angular dependence enables easy, cost-effective installation. An integrated LCD display and a version with remote sensing probe are available.



EE65 - A / B

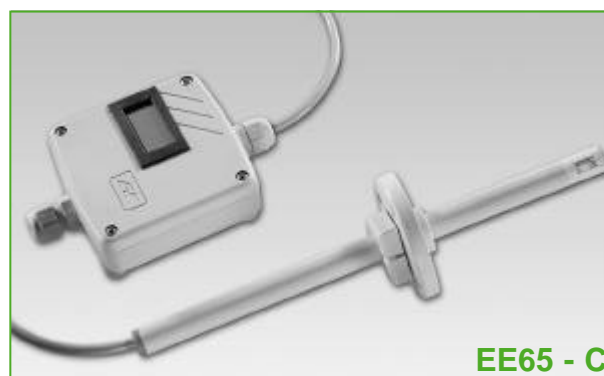

EE65 - C

### Typical Applications

**HVAC**  
**process and environmental control**

**low angular dependence**  
**easy installation**  
**adjustable to application requirements**

### Features

### Technical Data

#### Measuring values

Working range <sup>1)</sup>	0 ... 10 m/s	
	0 ... 15 m/s	
	0 ... 20 m/s	
Output <sup>1)</sup>	0 - 10 V	-1 mA < I <sub>L</sub> < 1 mA
	4 - 20 mA	R <sub>L</sub> < 450 Ω
Accuracy at 20 degC, 45 % RH and 1013 hPa	0 ... 10 m/s	± (0.3 m/s + 3 % of measuring value)
	0 ... 15 m/s	± (0.3 m/s + 3 % of measuring value)
	0 ... 20 m/s	± (0.3 m/s + 4 % of measuring value)
Response time τ <sub>90</sub> <sup>1) 2)</sup>	typ. 2 sec. or typ. 0.2 sec.	(at constant temperature)



#### General

Power supply	SELV 24 VAC/DC ± 10 %,	
Current consumption for AC supply	max. 150 mA	
	for DC supply max. 90 mA	
Angular dependence	< 3 % of measurement at   Δα   < 10°	
Cable gland	M16x1.5	
Electrical connection	screw terminals max. 1.5 mm <sup>2</sup>	
Electromagnetic compatibility	EN 50081-1	
	EN 50082-1	EN 50082-2
Housing/protecting class	Polycarbonat / IP65 , with LC-display IP40	

1) Selectable by jumper

2) Response time τ<sub>90</sub> is measured from the beginning of a step change of air velocity to the moment of reaching 90% of the step.





EE65-				
-------	--	--	--	--

model:	velocity
housing:	duct mounting
probe length:	200 mm
display:	with LC-display