

ELECTRONIC ROOM THERMOSTAT WITH DISPLAY

USE

Room Thermostat with display for temperature regulation in heating system

INSTALLATION AND OPERATION

2 wire connection

It replaces the traditional room thermostat without major modifications to the existing installation and is connected with two wires only. Power supply: two batteries.

Thermometer functions, constantly showing the room temperature (range 0-40 C)

Wall mounting fixing screws included

TECHNICAL FEATURES

Possibility to read the temperature

Regulation comfort temperature 5-35 C

(double insulation).

Two switches buttons for the regulation of the temperature (accuracy +/- 0,5 C)

Reset button to bring the comfort temperature to the preet value (20C)

HOMOLOGATION AND STANDARDS

Complies with CEI EN 60730-1 standards and following releases


ELECTRICAL FEATURES

Contact rating 5(3)A 250V~

Disconnection (1B).

Alimentazione con 2 pile a stilo AAA alcaline da 1,5V

Classe di protezione II

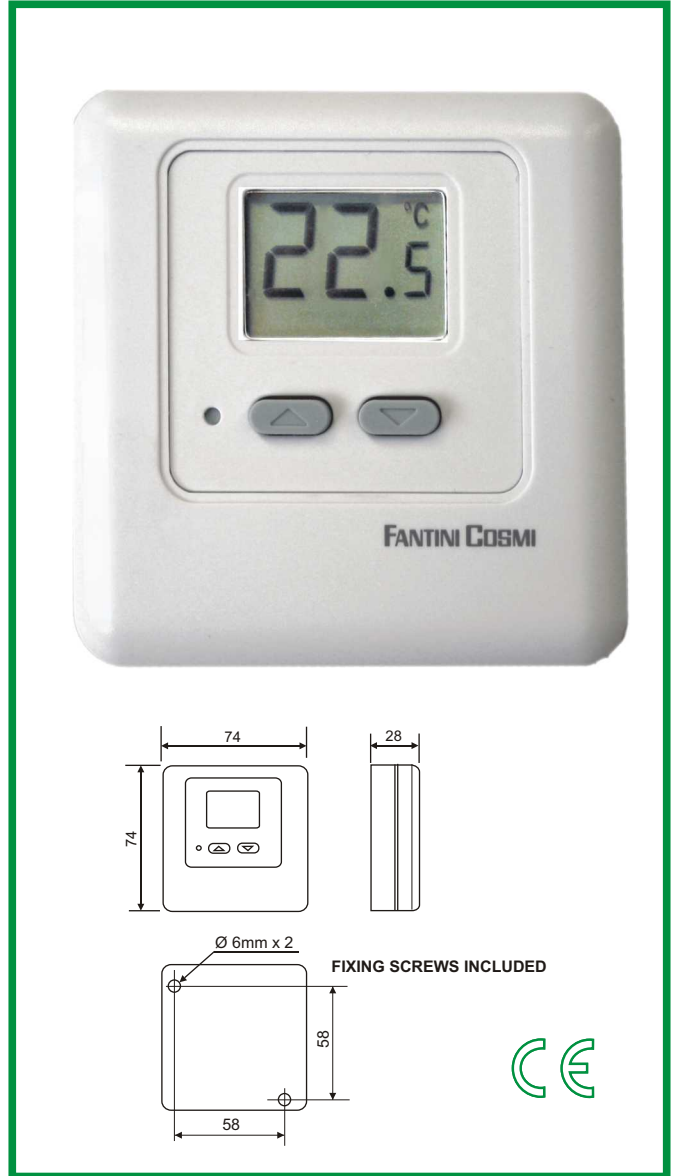

TYPE	Range °C	Differential K	Range thermometer function °C	Power supply V-	Working temperature °C	Admissible storage and transport temp. °C	Protection	Weight Kg	Packs of No
C82	5 to 35	± 0.5	0 to 40	2 battery AA dry 1.5V	-10 to 50	-30 to 60	IP20		

N.B. Differential values refer to a temperature rising speed of 4 K/hour in air

